

The MAD Cowl - Available painted for extra protection and longevity, or alternatively, also available in an unpainted uncoated aluminium finish

- Aerodynamically shaped to reduce the effects of down draught in your chimney
- Made from high quality stainless steel and aluminium
- Universal fitting. Maximum outside diameter of chimney pot 275mm
- Adapter plates required for flue applications below 200mm
- It is recommended that the Mesh birdguard needs to be removed for use with solid fuel burning appliances, but can remain in place for gas appliances
- Withstands flue temperatures of up to 200°c
- Sold as a strap fixing model or alternatively can be purchased as a bolt fixing model
- This terminal has been tested and certified to BSEN 1856
- Suitable for use in conjunction with normal coal, fully seasoned wood and gas appliances
- J D Burford Ltd tel:- 01685 811882

CF44 9UP

CE EN1856-1 – N1 – W –
VmL50100 – O




MADCOWLS
PROBLEM SOLVING CHIMNEY COWLS



Strap Fixing Model

Fix 150mm straps to base of cowl (at four points) on the outside of the cowl using butterfly screws. Ensure the hook end of straps are pointing outwards from the pot. Tighten jubilee around straps and chimney pot. Ensure the cowl is secure

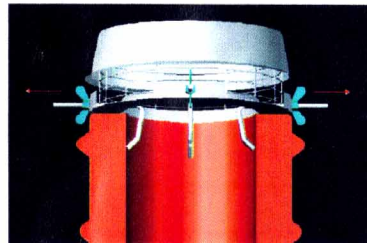

Bolt Fixing Model

Slide the four hook bolts from the centre of the base outwards and tighten the wing nuts. Tighten the wing nuts until the hook bolt clamps firmly to the inside of the pot. (Take care not to over tighten). Ensure the cowl is secure